




## BAG STYLES:



FLAT-BOTTOM



PILLOW STYLE



EUROSLOT/  
HOLE PUNCH



GUSSETED



QUAD-SEAL



BRICK FOLD-DOWN  
/TAPE-DOWN

## MAXIMUM SPEED:

Up to **150** cycles  
per minute

## MAXIMUM BAG SIZE:

260 mm x 400 mm  
(10.24" x 15.75")

## MINIMUM BAG SIZE:

50 mm x 60 mm  
(1.97" x 2.36")

## VIKING MASEK VFFS

E250

E400

ES400

M250

M250 BiB

M400

M500

M650

**\$250**

S400

SACHET SA300-SA500

SIGMA

STICK PACK ST200-ST800

VELOCITY

**OUR SERVO-DRIVEN VERTICAL BAGGER THAT IS UNBELIEVABLY FAST, SMOOTH, AND QUIET!**



## FEATURES:


- Robust, stainless steel frame
- Enclosed, servo-drive jaw actuation
- Quiet running speeds up to 150 cycles per minute
- Off-the-shelf components
- Minimal maintenance requirements
- Short film path and small footprint
- No tool changeover
- Self-centering pull belts
- Automatic film tracking
- VFD powered film unwind
- Quick film splice table
- Product stagers
- End-seal cooling air
- Bag deflators
- Photo eye and encoder
- Double guard door
- Jaw obstruction detection
- Runs most film structures
- Siemens control platform
- Storage for 50 product recipes

## OPTIONS:


- Ultrasonic sealing jaws
- Quad seal bag assembly
- Flat bottom bag assembly
- Siemens or Allen Bradley control platform
- Impulse sealing for poly film structures
- Integration with variety of fillers, printers, metal detectors, label applicators, and checkweighers
- Washdown construction
- Vacuum pull belts
- Fold-down/tape-down unit
- Hole punch (Euroslot and Round)
- Load shelf
- Product settler
- Gas flush
- Static eliminator
- Tear notch
- Degassing valve applicator
- In-feed and take-away conveyors
- Remote diagnostics

## S250 VIEWS:


FRONT



SIDE

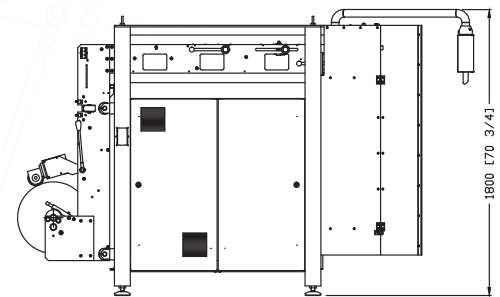

TOP

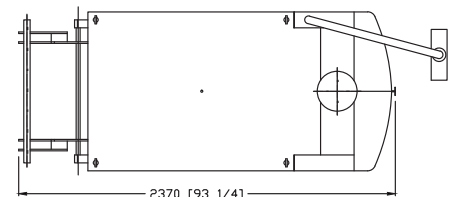

Standard views, dimensions may vary.

